


# THREADED SLEEVE SW-701

When you want to maximize the length adjustment of your assembly at the point where a wire rope is attached, the TUF-GRIP SW-701 Threaded Sleeve is ideal.

The sleeve is made to meet your requirements. The standard sleeve material is carbon steel, but stainless steels and higher strength steels are also available on request. We furnish the sleeves without wrench flats unless specified on the order. Please indicate dimensions across the flats, the number of sides, and the location on the fitting.

Please specify the  $L_s$ ,  $L_t$  and  $D$ .

To determine the thread length ( $L_t$ ), use the *minimum dimensions* needed. This allows us to use existing qualified designs. The standard thread used is Right Hand National Coarse Class 2A, but other threads are available on request.

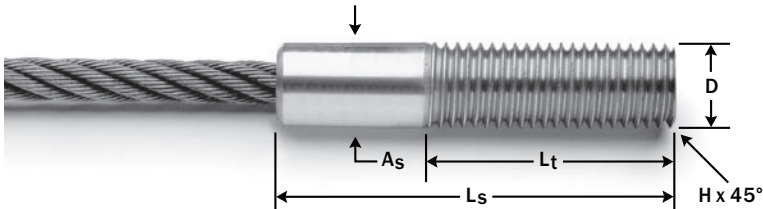

You may order custom designs with different fitting lengths if you want, but that may reduce the assembly's rated capacity. Call our **Customer Service Department** to evaluate all the possibilities.

EQUIVALENT TO SA155 SERIES

## Dimensions for Threaded Sleeve SW-701

Dash No.	Rope Dia.	D	$L_t$	$L_s$	Approx. $A_s$
3	3/32	1/4	1/2	1	1/4
4	1/8	1/4	3/4	1 1/4	1/4
5	5/32	5/16	1	1 1/2	5/16
6	3/16	3/8	1 1/4	1 3/4	3/8
7	7/32	7/16	1 1/4	2	7/16
8	1/4	1/2	1 1/2	2 1/4	1/2
9	9/32	9/16	1 1/2	2 1/2	9/16
10	5/16	5/8	1 3/4	3	5/8
12	3/8	3/4	2	3 1/2	3/4
14	7/16	7/8	2 1/4	4	7/8
16	1/2	1	2 1/2	4 1/2	1
18	9/16	1 1/8	2 3/4	5	1 1/8
20	5/8	1 1/4	3	5 1/2	1 1/4
24	3/4	1 1/2	4	7	1 1/2
28	7/8	1 3/4	5	8	1 3/4
32	1	2	6	9	2

All dimensions are in inches.